

AMS UltraPro™ Solvent Elements

Solvent Stable Ultrafiltration Spiral Wound Elements

Description The AMS UltraPro™ membrane is developed for long-term performance with high and stable fluxes in presence of solvents, featuring high pressure and temperature compatibility. AMS UltraPro™ elements are used for either pre-filtration before nanofiltration or as stand-alone membranes in solvent purification and component concentration. Typical solvents include*:

- Methanol, Ethanol, Propanol
- Hexane
- THF
- Acetone, Acetonitrile
- Ethyl acetate
- DMF

Characteristics	Membrane	Cut-off Rate (Da)	Water Flux
	S-1801 ^[1]	10000	18LMH/bar ^[1]
	S-U301 ^[2]	2500	60LMH ^[2]

Limits		
	Max Operating Pressure	25 bar (360 psi)
	Max Pressure Drop	1 bar (14.5 psi) for individual element
	Max. Operating Temperature	40 °C (122 °F)
	Max. Cleaning Temperature	40 °C (122 °F)
	Operating pH range	2-12
	Cleaning pH range	1-13
	Recirculation Flow	1812: 4.0 – 8.0 liter/min (1.0 – 2.1 gal/min) 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) 8040: 90 – 167 liter/min (23 – 42.7 gal/min)
	Pressurization/ Depressurization rate	< 0.7 bar/second (10psi/second)
	Heating & cool down rate	< 5°C /minute (41 °F/minute)

Area m ² (ft ²)	Size	1812	2540	4040	8040
	31mil (B)	0.19 (2)	1.8 (19)	6.2 (67)	29 (312)
	46mil (C)	0.17 (1.8)	1.6 (17)	4.9 (53)	24 (260)

^[1] Test condition: RO water, 27psi (2bar), 86°F (30°C), pH 7.0.

Permeate flow for individual elements may vary ± 20%.


^[2] Test condition: RO water, 225psi (15.5bar), 86°F (30°C), pH 7.0.

^[3] For the purpose of improvement, specifications may be updated periodically.

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

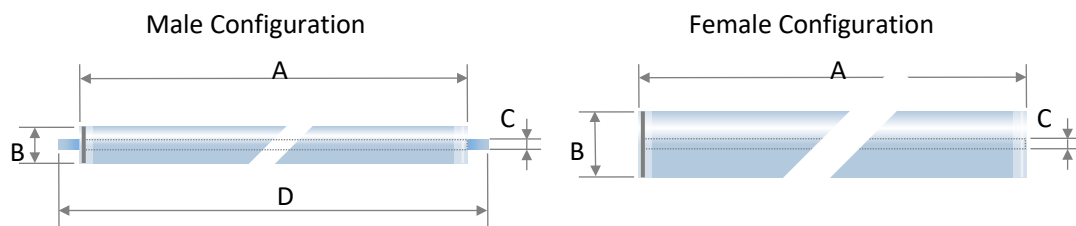

Size mm(inch)	A ^[1]	∅B ^[2]	∅C ^[3]	D	Permeate tube
1812	305 (12)	46 (1.8)	16 (0.629)	/	Female
2540	956 (37.6)	62 (2.4)	19 (0.748)	1016 (40)	Male
4040	965 (38)	99 (3.9)	19 (0.748)	1016 (40)	Male
8040	1016 (40)	200.5 (7.9)	28.9 (1.138)	/	Female

^[1] Tolerance: ±0.5 mm

^[2] Tolerance: -2~0 mm

^[3] 1812 tolerance: ±0.1 mm. 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residue chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤40 °C (104 °F);
- Hydrochloric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Nitric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤35 °C (91 °F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5 % at pH 10.5 – 11, temperature ≤35 °C (91 °F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30 °C (39 – 86 °F). Storage solutions should be made with: 1.5 % w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–S-U301–8040–B

AMS	S-U301	8040	B
Design/Application	Membrane	Diameter & Length	Feed spacer
AMS	S-U301	1812	B: 31mil /0.78mm (diamond)
AMS Membrane series	S-1801	2540	C: 46mil /1.1mm (diamond)
		4040	M: 34mil /0.86mm (diamond)
		8040	