

# UNISOL ST Membrane Module



**Code:** HP12.0-ST-RO4-30-SS316L/SS2205

## Product parameters:

Max. Operating Pressure	Effective Membrane Area	Temperature Max.	pH range	Wet Weight	Rejection	Flux
120bar	30m <sup>2</sup>	45°C	3-11 (Operating) 2-12 (CIP)	100kg	98.5%	500L/h

**Test conditions:** Inlet pressure 90±2bar, Temperature 25±3 °C, Feed flow 6000L/h,  
Conductivity 65000us/cm (NaCl solution).

## Dimensions:

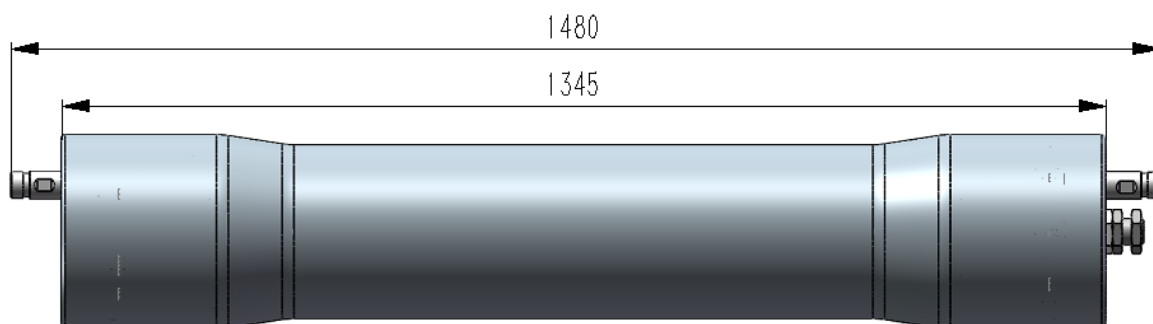

High pressure nozzle: 1 "Victaulic interface  
Permeate connection: 9mm hose

Note: the feed can only be connected to the inlet connection. Do not connect to outlet (concentrate) connection.

*UNISOL reserves the right to change specifications without prior notification, please refer to the latest version on UNISOL website.*