

# STRO Membrane Module



**Code:** MP9.0-ST-RO4-25-SS316L/SS2205

## Product parameters:

Max. Operating Pressure	Effective Membrane Area	Temperature Max.	pH range	Wet Weight	Rejection	Flux
90bar	25m <sup>2</sup>	45°C	3-11 (Operating) 2-12 (CIP)	60kg	> 98.5% <sup>(1)</sup>	> 500L/h <sup>(1)</sup>

<sup>(1)</sup> Test conditions: 32000ppm NaCl solution, 800psi (55bar), 75°F (25°C), feed flow 8000L/h.

## Dimensions:

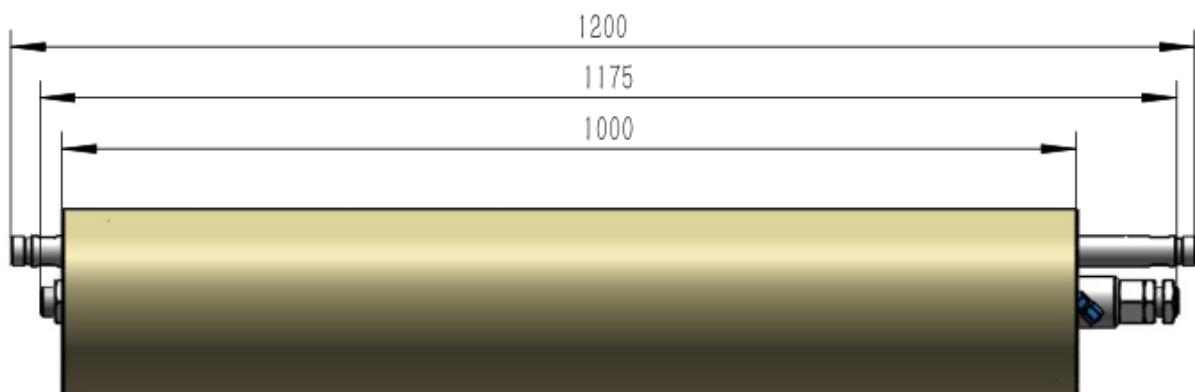

High pressure nozzle: 1 "Victaulic interface  
 Permeate connection: 9mm hose

Note: the feed can only be connected to the inlet connection. Do not connect to outlet (concentrate) connection.